


Assembly Instructions


Model: Designer Single

www.Hiddenbed.ca


MAIN PARTS

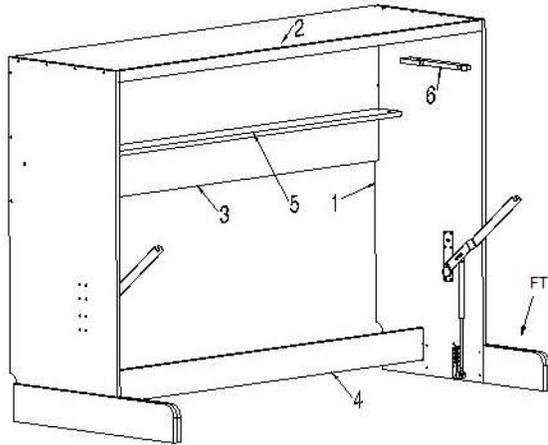

COMPONENTS		
Num.	Name	Qty.
1	Gable L/R	1+1
2	Top	1
3	Back	1
4	Bottom Stretcher	1
5	Shelf	1
6	Stop & Lock	1
FT	Feet	1+1

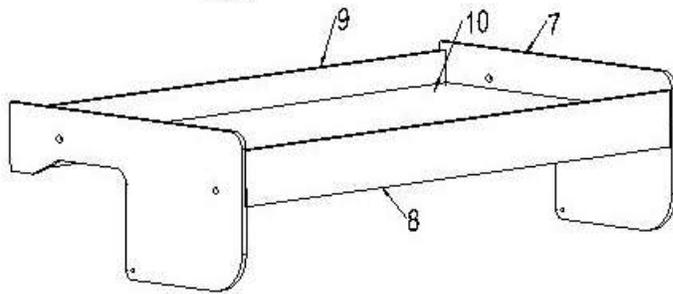




COMPONENTS		
Num.	Name	Qty.
7	Bed side L/R	1+1
8	Front Rail	1
9	Back Rail	1
10	Mattress Cover	1

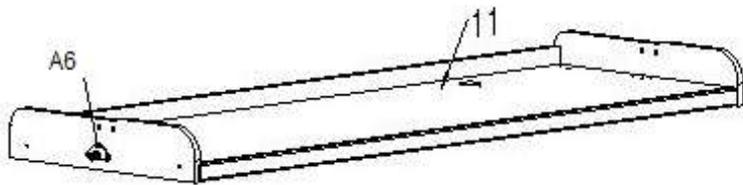


COMPONENTS		
Num.	Name	Qty.
11	Desk Top	1
A6	Bearer	1+1

Note: Desk is fully assembled.

MECHANISM KIT

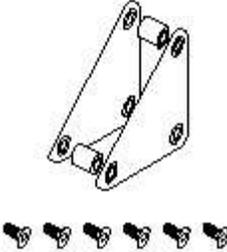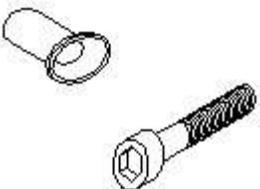A7	A8	A9
		
Link Pivot 2 Sets	Bushing & Bolt 2 Sets	Lock 2 Pcs.

HARDWARE KIT

A		CONFIRMAT BOLTS 1/4" x 2-3/4"	38 Pcs.
B		SCREW - #8 1-1/2" FH	32 Pcs.
C		SCREW - #8 5/8" PH	18 Pcs.
D		ANGLE BRACKETS	4 Pcs.
F		VELCRO & WASHER	2 Pcs.
I		SCREW - #8 1-1/4" FH	14 Pcs.
		POWER BAR (located in desk box)	
Note: All Hardware Bags should have 2 more screws than required for assembly.			

ADDITIONAL TOOLS:

Allen keys: 4mm and 10mm

Robertson #2 bit

Phillips #3 bit

Coloured screw caps


NOT SUPPLIED:

Drill/impact driver (Power tool)


Note: Assembly of Hiddenbed requires 2 people.

CASE ASSEMBLY

- 1 Lay all bed body parts on the floor; two sides (1), top (2), back (3), Bottom stretcher (4) and Shelf (5).
Attach stop & lock (6) with # 8 1-1/2" PH screws.
(See illustration on right)




- 2 Dowels will help align parts.
Begin assembly by aligning back to gable. Next, top, shelf and bottom stretcher.
Use confirmat bolts (A) to fasten parts to gables.
Repeat process with other gable.
Note: To aid in alignment of back to gable, lift both parts off floor.
- 3 Stand case in upright position and attach shelf to back using confirmat bolts. Next, attach top to back at rear of unit.
Attach one felt pad to top and bottom of each gable.
- 4 To attach feet to gables, position case in room.
Align foot with gable, apply downward pressure and fasten using #8 1-1/4" FH screws (I).

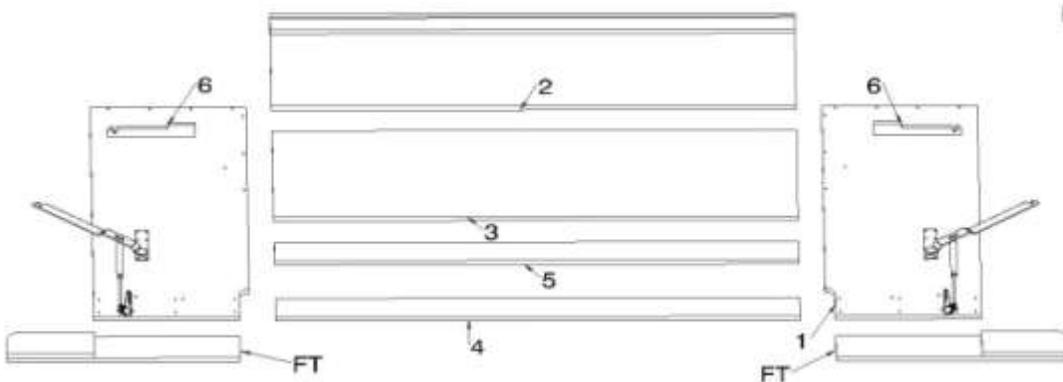

BED ASSEMBLY

- 1 Lay all bed frame parts on the floor:
Two sides (6), front rail (7), and back rail (8).
Attach handle to the front rail with #8 1" FH screws. Pilot holes are drilled for easy placement.
Match letters on bed sides with letters on rails.
 - 2 Begin assembly by attaching bed side (A) to rail (A).
Fasten with confirmat bolts (A).
Repeat for the other matching parts B-D. (Dowels will help align parts)
- Cover exposed screws with screw caps.

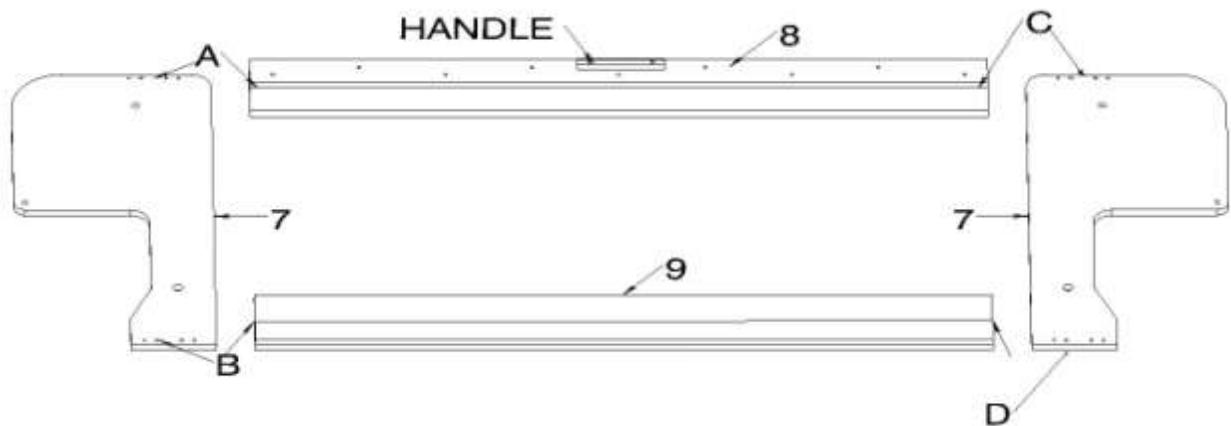


BED ASSEMBLY

- 1 Lay desk in front of bed body.
- 2 Carefully flip over bed frame and set on the top of desk sides aligning holes for link pivot.
- 3 Insert bushings (A7) in the holes, then attach plates on each side and tighten securely with bolts, using 4 mm Allen key.

Note: To align bed and desk, lift bed frame 1-2 mm before attaching bolts.

- 4 Carefully slide bed and desk holes in to bed body (avoid scratching), and align pivot holes with bolt opening on mechanism.

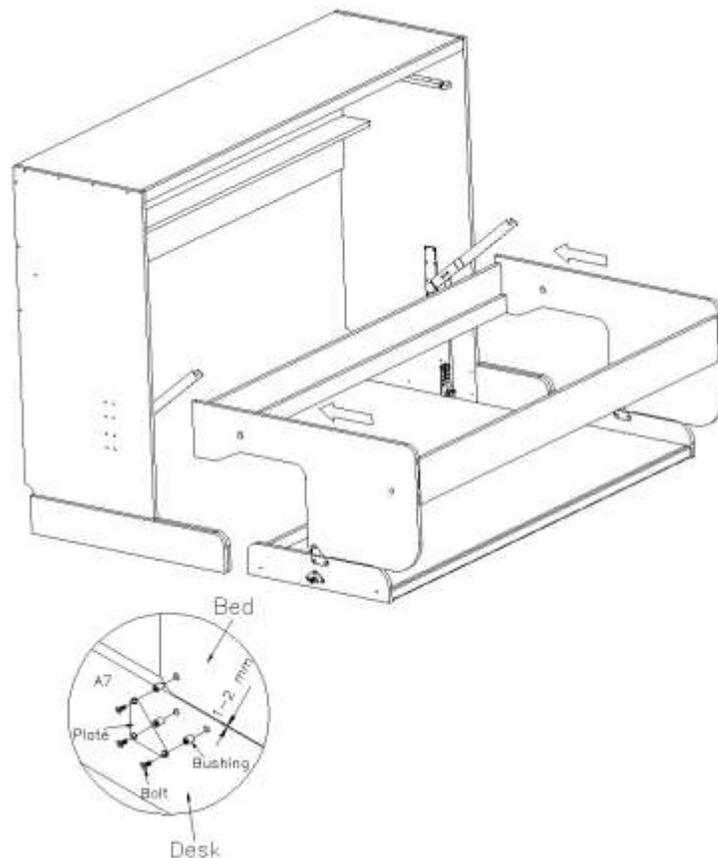


BED ASSEMBLY


- 5 Carefully place Mattress Cover in bed opening.

Insert bushing (A8) through hole in the bed side and tighten, using 10 mm Allen key.

Note: Do not over tighten bolts.




- 6 Using #8 1-1/2" FH screws (B), attach mattress cover to bed rails.

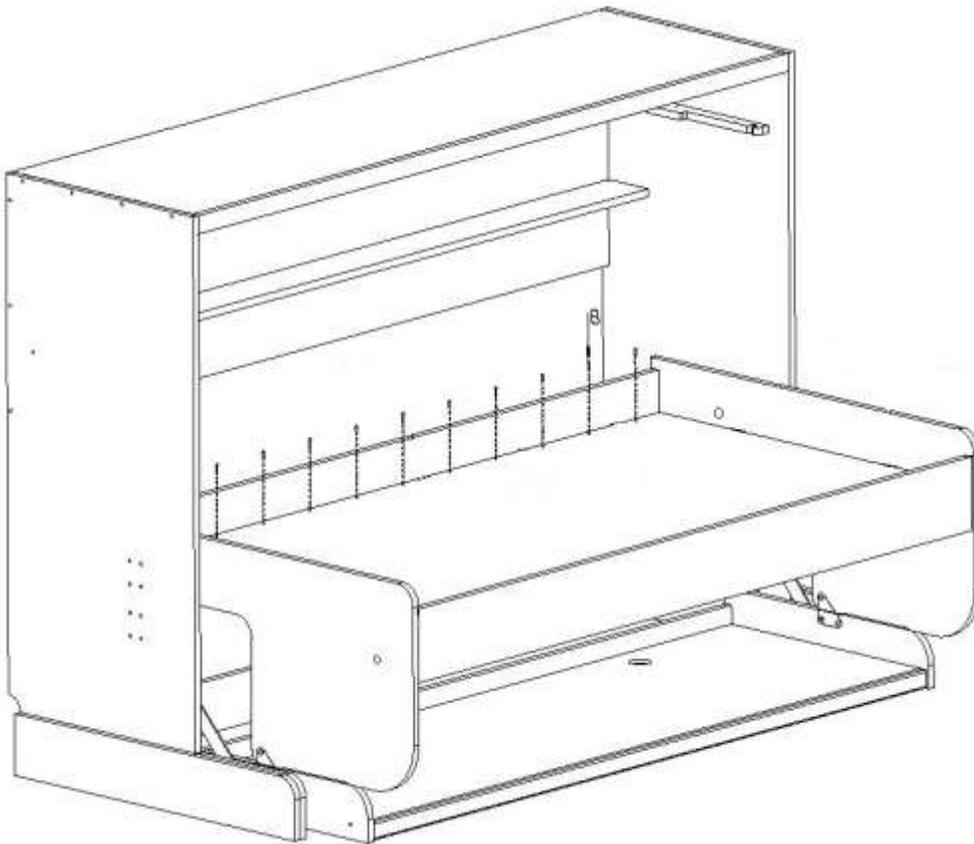


BED ASSEMBLY

- 7 Using #8 5/8" PH screws(C) and washers, attach Velcro straps (E) to mattress cover.
Leave 2" (5cm) space from bedrails.
- 8 Using #8 5/8" PH screws (C), fasten 2 angle brackets (D) to each end of bed frame, then fasten angle bracket to bed side.

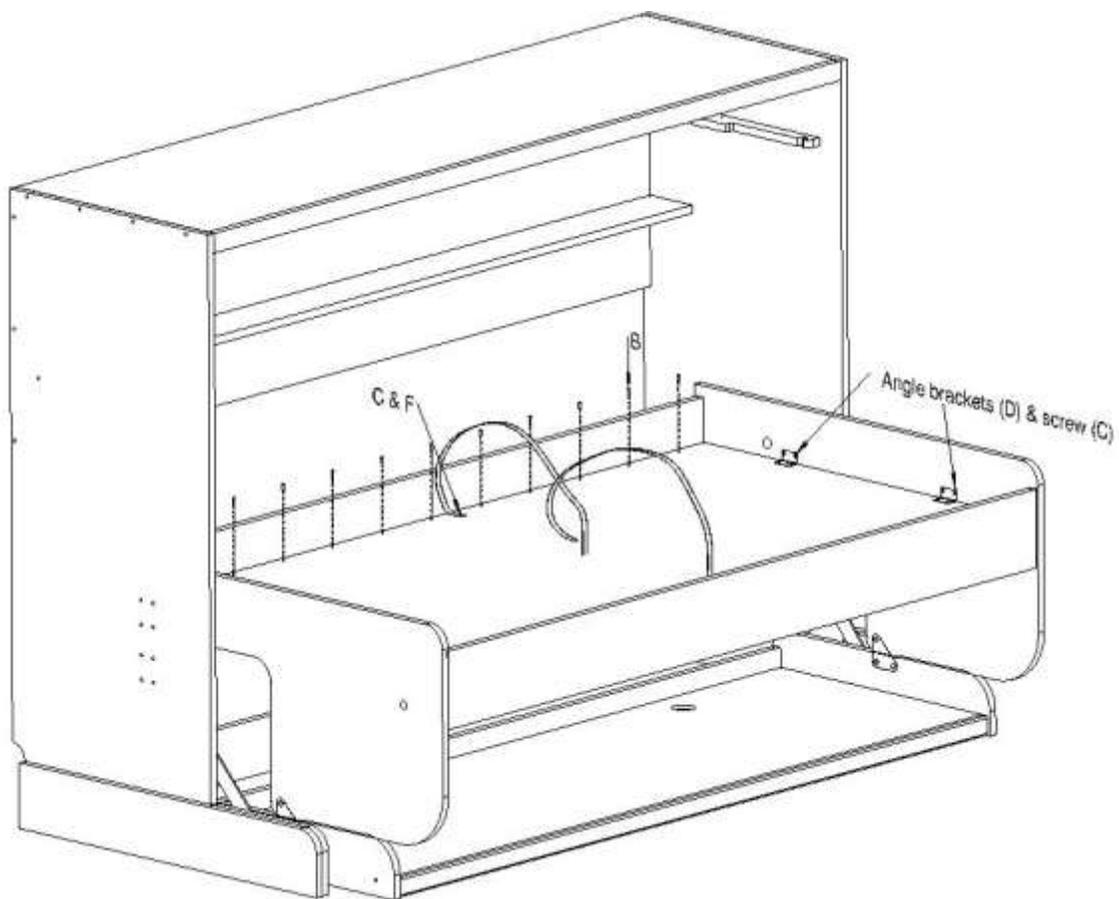


FINAL ASSEMBLY

- 9 With locks (A9) ready, lift bed into desk position and lock in place. Fasten both locks with #8 5/8" PH screws (C).

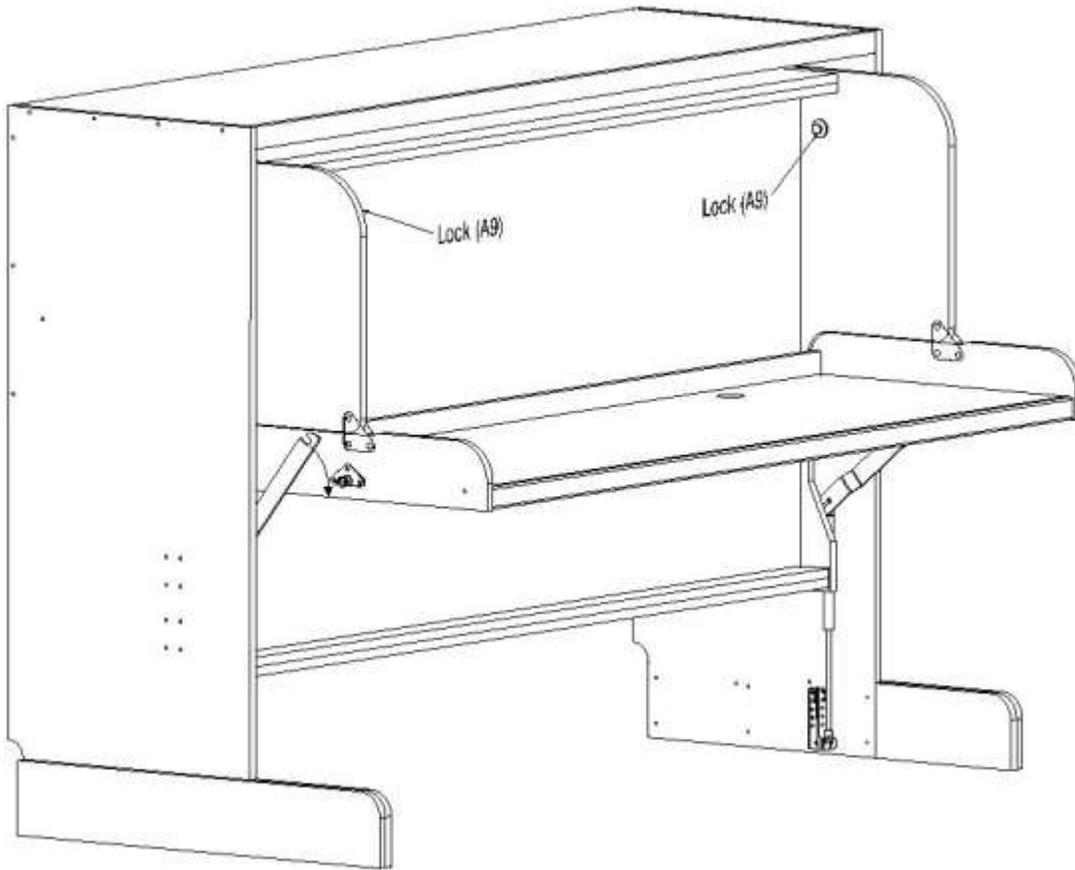

FINAL ASSEMBLY

- 10 Hold desk firmly and allow desk to pivot into horizontal position.
- 11 Carefully pull mechanism arm downward. Keep fingers away from hook!
Slowly release mechanism arm and hook it on the bearer slot.

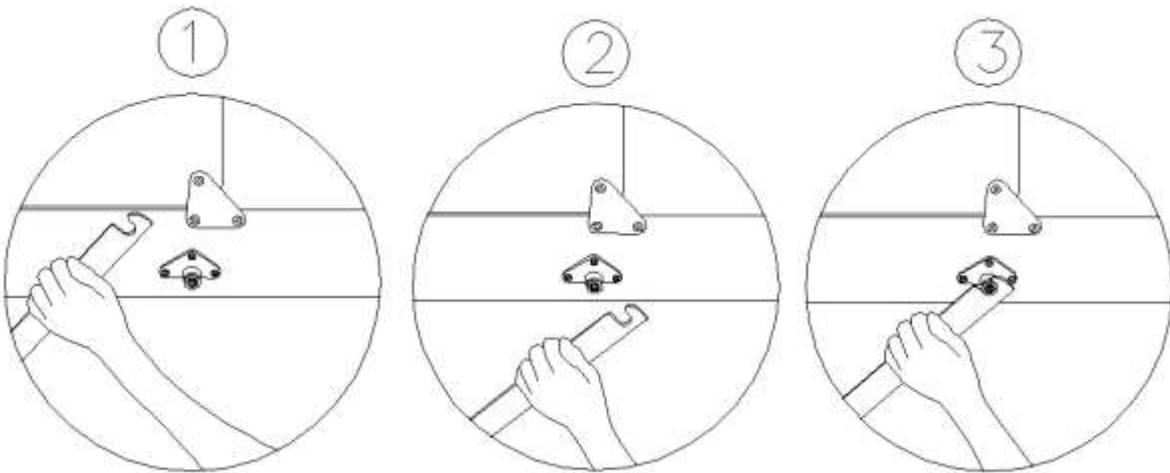

FINAL ASSEMBLY

12 Unlock bed and pull downward using handle.

Place mattress in bed opening and secure with Velcro strap.

Your Hiddenbed is now ready for use.

ENJOY!

GUIDELINES FOR PROPER USE

-Always stand in the center of your Hiddenbed to make transformation

-To open the bed, first unlock it, and then pull the handle towards body.

-To close the bed, lift front bed rail to chest height and push into unit, lock bed securely using stop & lock.

-If Hiddenbed is installed on uneven floor or thick carpet, it may be necessary to secure it to wall for safe operation.

WARNINGS

-Gables bear the majority of weight and should be on level surface. Hiddenbed can be placed on carpet, but do not place carpet or any shim beneath desk side or body side alone.

-Use a mattress of 25-30 kg of a maximum height of 12 in. Hiddenbed is designed to carry weight on desk, 10-20 kg is ideal. Using these balance settings you will not have to use more than 100N to transform Hiddenbed furniture.

-Avoid excessive or asymmetric loads on desk.

-While lowering, please verify that bed bottom does not touch things left on the desk. Items left on the desk cannot exceed 18 inches height. There is less height available at rear of desk.

-Be careful not to trap fingers between moving parts.

-If power or signal cables are to be installed, ensure they will not be pinched when transforming Hiddenbed. Consult a qualified person if necessary.

-Visit Hiddenbed.ca for more details.



Use the lock placed at the desk side to safe use in bed and desk position.

	<p>WARNINGS</p> <p>(!) Like a sliding door or a car door or a bike, you have to do certain things to enjoy Hiddenbed Safely and reliably. Pay attention to these recommendations!</p>